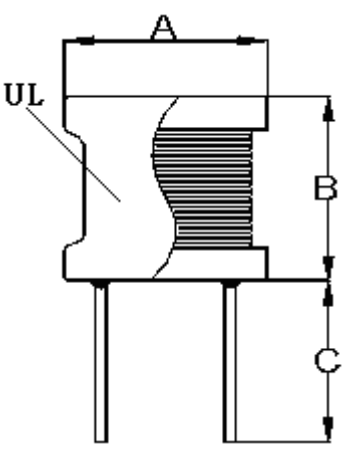
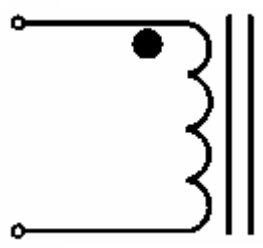








SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:	
PART NO: RC0810U-331K		DWG.NO: HX4007224	
CUSTOMER PART NO:		CUST.DWG.NO:	
(1) DIMENSION(UNIT: mm) 		A	10.0 (MAX) m/m
		B	11.5 (MAX) m/m
		C	15.0 ± 2.0 m/m
		D	m/m
		E	m/m
		F	m/m
		G	m/m
		H	m/m
		I	m/m
		J	m/m
(2)ELECTRICAL REQUIREMENTS		(3)SCHEMATIC	
L (uH)	330 ± 10%		
RDC (Ω)	1 (MAX)		
IDC (A)	0.9 (MAX)		
TEST CONDITION	1KHz / 0.25V		
		APPROVED BY 	
		CHECKED BY 	
		DRAWN BY 	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:				
PART NO: RC0810U-331K				DWG.NO: HX4007224				
CUSTOMER PART NO :				CUST.DWG.NO :				
TEST CONDITION: 1KHz / 0.25V				DIMENSION (UNIT : mm)				
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C		
SPEC	330 ± 10%	1 (MAX)	0.9 (MAX)	10.0 (MAX)	11.5 (MAX)	15.0 ± 2.0		
1	332.4	0.573	OK	9.25	10.85	14.63		
2	331.8	0.571	OK	9.18	10.92	14.72		
3	333.0	0.568	OK	9.13	10.89	14.68		
4	332.6	0.560	OK	9.15	10.95	14.72		
5	332.4	0.566	OK	9.24	10.88	14.66		
6	331.1	0.563	OK	9.22	10.86	14.81		
7	333.3	0.572	OK	9.20	10.92	14.95		
8	332.8	0.569	OK	9.26	10.94	14.74		
9	331.9	0.570	OK	9.24	10.87	14.87		
10	332.0	0.572	OK	9.13	10.96	14.54		
\bar{X}	332.33	0.568		9.2	10.904	14.732		
R	2.2	0.013		0.13	0.11	0.41		
TEST INSTRUMENTS HM2791 METER FOR L						APPROVED BY		
								
						CHECKED BY		
								
						DRAWN BY		
								

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw